


■呼び圧力16Kフランジ

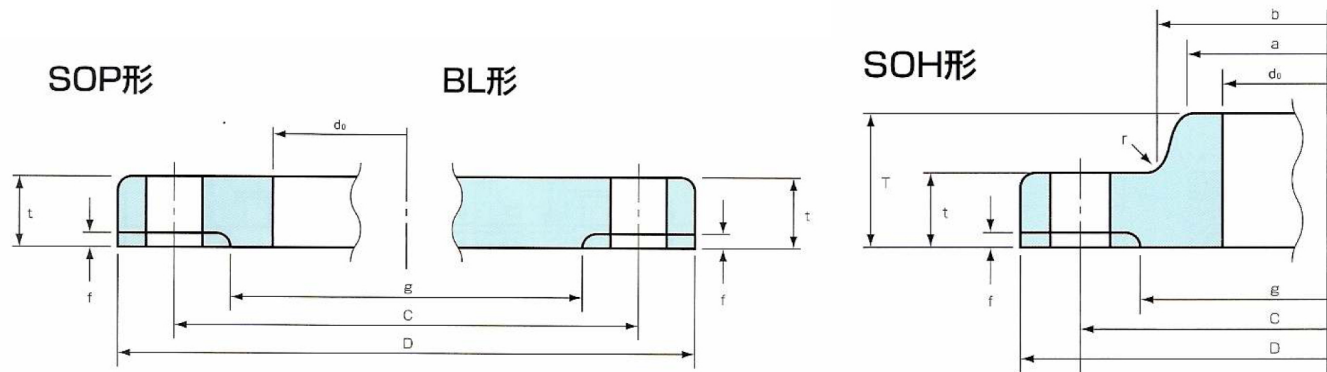

JIS B 2220-2004

単位：mm

呼び径		適用管 の 外径	内径 d ₀	外径 D	厚み t	全長 T	ハブ部分			ガスケット座		ボルト穴		重量 (kg)			
A	B						ハブ先 a	ハブ元 b	半径 r	座厚 f	座径 g	中心径 C	数	径	SOP形	SOH形	BL形
10	3/8	17.3	17.8	90	12	16	26	28	4	1	46	65	4	15	0.51	0.52	0.53
15	1/2	21.7	22.2	95	12	16	30	32	4	1	51	70	4	15	0.56	0.58	0.60
20	3/4	27.2	27.7	100	14	20	38	42	4	1	56	75	4	15	0.72	0.75	0.79
25	1	34.0	34.5	125	14	20	46	50	4	1	67	90	4	19	1.13	1.16	1.22
32	1 1/4	42.7	43.2	135	16	22	56	60	5	2	76	100	4	19	1.46	1.53	1.66
40	1 1/2	48.6	49.1	140	16	24	62	66	5	2	81	105	4	19	1.56	1.64	1.79
50	2	60.5	61.1	155	16	24	76	80	5	2	96	120	8	19	1.7	1.83	2.09
65	2 1/2	76.3	77.1	175	18	26	94	98	5	2	116	140	8	19	2.4	2.58	3.08
80	3	89.1	90.0	200	20	28	108	112	6	2	132	160	8	23	3.5	3.61	4.41
90	3 1/2	101.6	102.6	210	20	30	120	124	6	2	145	170	8	23	3.7	3.89	4.92
100	4	114.3	115.4	225	22	34	134	138	6	2	160	185	8	23	4.5	4.87	6.29
125	5	139.8	141.2	270	22	34	164	170	6	2	195	225	8	25	6.5	7.09	9.21
150	6	165.2	166.6	305	24	38	196	202	6	2	230	260	12	25	8.7	9.57	12.7
200	8	216.3	218.0	350	26	40	244	252	6	2	275	305	12	25	10.9	12.0	18.4
250	10	267.4	269.5	430	28	44	304	312	6	2	345	380	12	27	18.0	20.1	30.4
300	12	318.5	321.0	480	30	48	354	364	8	3	395	430	16	27	21.5	24.3	40.5
350	14	355.6	358.1	540	34	52	398	408	8	3	440	480	16	33	30.8	34.4	57.5
400	16	406.4	409.0	605	38	60	446	456	10	3	495	540	16	33	42.8	47.4	81.7
450	18	457.2	460.0	675	40	64	504	514	10	3	560	605	20	33	55.1	61.8	107
500	20	508.0	511.0	730	42	68	558	568	10	3	615	660	20	33	65.1	73.7	132
550	22	558.8	562.0	795	44	70	612	622	10	3	670	720	20	39	77.9	87.9	163
600	24	609.6	613.0	845	46	74	666	676	10	3	720	770	24	39	86.0	98.4	192

備考 1. JIS B2220はSOP形の規定はなく、呼び径10A～600AのSOH形FFとBL形FFを規定している。